

## Features

This parking garage light fixture is designed with a creative mounting bracket, which can, to a great extent, save installation time.

- **Housing:**

die-casting aluminium with anti-static, thermostable, anti-corrosive paint

- **LEDs:** Philips LED


- **Application:**

parking garage; corridors of hotel, hospital, restaurant; toll station, service station.

operation temp. -30 °C ~ 45 °C ; Storage temp. -20 °C ~ 45 °C

- **Certification:**

UL # E36335, DLC 4.2, CE, RoHS



## Technical:


Wattage	LED Type	CRI (Ra)	Color	Lumen	Angle	Voltage	Dimmable	Housing color	IP level	Net	Package	Wattage
35W	Seoul 3030	≥80	NW/DW	4025LM	150°	AC100-277V	Optional	Dark bronze	IP65	3.7lb	485×485×240mm 8pcs/ctn	31.5lb 5 years
70W	Seoul 3030	≥80	NW/DW	8050LM	150°	AC100-277V	Optional	Dark bronze	IP65	5.7lb	330×330×295mm 2pcs/ctn	17.4lb 5 years

## Ordering information:



For example: SPS35A02-CL1-42DW

Company	LED type	Watt	LED code	Product	LED QTY	CCT
SP	S	35 35- 35W 70- 70W	A02	CL1	42 42- 35W 84- 70W	DW DW- 5000K NW- 4000K

## Structure:



70W




35W




light sensor

## Installation:

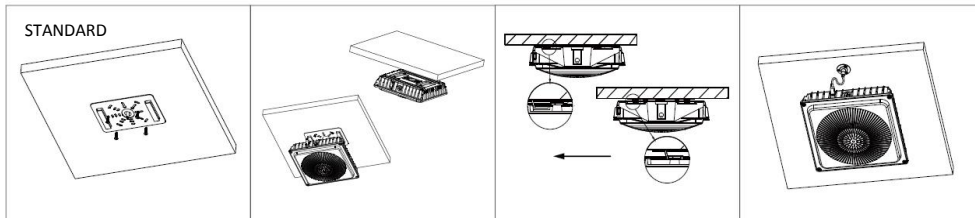


1. Fix the plate on ceiling with two screws
2. Wiring and slide the lamp on the hooks of the plate, make sure the hooks inserted
3. Screw the safety cable on ceiling.


Other options

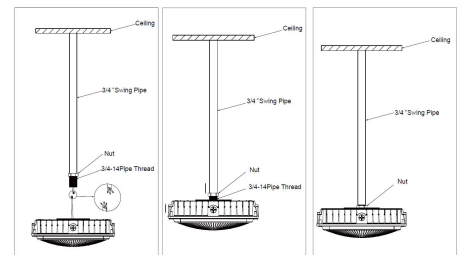


### ANSI



### EN



### Dimmable



※ Note: If the lamp be used outside, please keep the connector water-proof.

### Remarks:

1. Lumen is based on the condition of Ta<25 °C with a tolerance of ±15 %.
2. To guarantee the long lifespan and safety of lamp fixture, please make sure fixture take regular cleaning and maintenance
3. Before installation, make sure power off
4. Installation of the fixture should be carried out by a qualified technician only.