

Features

This HL10 series highbay light is one of our most popular products. It helps customers win many potential projects by its excellent performance.

- **Housing:**

cold-forging pure aluminium with cross-ventilation design

- **Power Supply:** Meanwell/Sosen

- **Application:**

workshop, factory, storage warehouse, exhibition center, gymnasium, stadium.

operation temp. -30°C ~ 45°C ; Storage temp. -20°C ~ 45°C

Technical:


Wattage	LED Type	CRI (Ra)	Color	Lumen	Angle	Voltage	Dimmable	IP level	Net	Package	Warranty	Certification
60W	Philips 3030	>70	NW/DW/CW	8420LM	125°	AC90-305V	Optional	IP65	1.67kg	480×480×260mm 4pcs/ctn 8.5kg	5 years	CE,RoHS,IK09
80W	Philips 3030	>70	NW/DW/CW	10860LM	125°	AC90-305V	Optional	IP65	3kg	540×285×295mm 2pcs/ctn 8kg	5 years	CE,RoHS,ENEC,CB,IK09

Ordering information:


For example: SPS60A02-HL10B-72DW

Company	LED type	Watt	LED code	Product	Finish color	LED QTY	CCT
SP	S S- SMD	60 60- 60W 80- 80W	A02 A02- Philips P02- Seoul	HL10	B B- Black	72 72- 60W 90- 80W	DW DW- 5000K WW-3000K NW- 4000K CW-5700K

Structure:

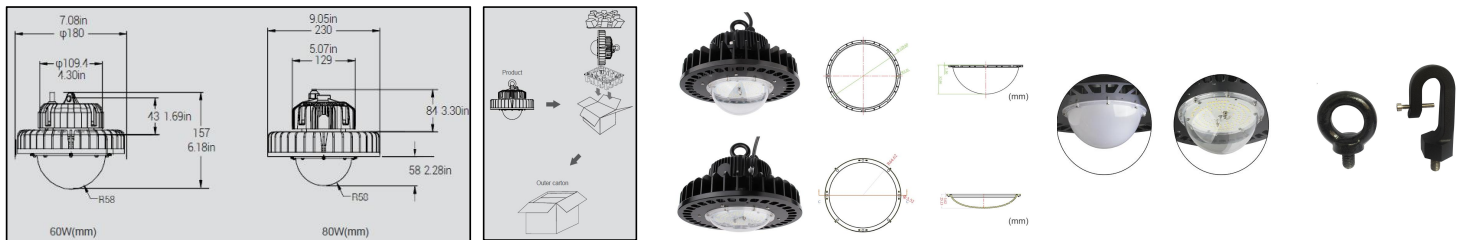

Installation:

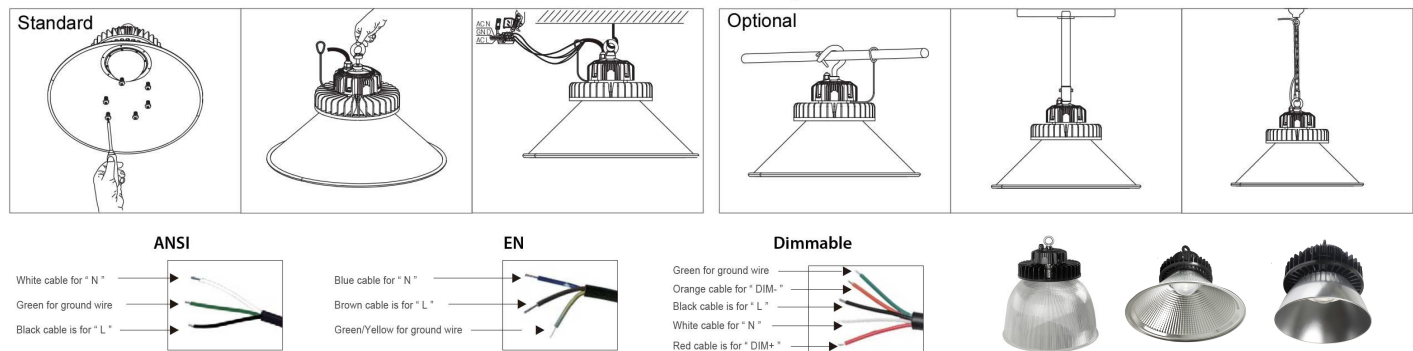

※ Note: If the lamp be used outside, please keep the connector water-proof.

Remarks:

1. Lumen is based on the condition of Ta<25°C with a tolerance of ±15 %.
2. To guarantee the long lifespan and safety of lamp fixture, please make sure fixture take regular cleaning and maintenance
3. Before installation,make sure power off
4. Installation of the fixture should be carried out by a qualified technician only.