

## Features

This HL10 series highbay light is one of our most popular products. It helps customers win many potential projects by its excellent performance.

- **Housing:**

cold-forging pure aluminium with cross-ventilation design

- **Power Supply:** Meanwell/Sosen

- **Application:**

workshop, factory, storage warehouse, exhibition center, gymnasium, stadium.

operation temp. -30℃ ~ 45℃ ; Storage temp. -20℃ ~ 45℃

- **Certification:**

CE, RoHS, IK09, ENEC, CB, UL E363359, DLC 4.2 premium, PSE, SAA, FCC

## Technical:


Wattage	LED Type	CRI (Ra)	Color	Lumen	Angle	Voltage	Dimmable	IP level	Net	Package	Warranty	L70(hours)
100W	Philips 3030	>70	NW/DW/CW	13800LM	125°	AC90-305V	Optional	IP65	3.2kg/7.06lb	540×285×295mm 2pcs/ctn 8.1kg/17.86lb	5 years	>54000hrs
150W	Philips 3030	>70	NW/DW/CW	20750LM	125°	AC90-305V	Optional	IP65	3.9kg/8.6lb	570×320×330mm 2pcs/ctn 10.3kg/22.71lb	5 years	>54000hrs
200W	Philips 3030	>70	NW/DW/CW	27400LM	125°	AC90-305V	Optional	IP65	5.2kg/11.5lb	570×360×365mm 2pcs/ctn 13.2kg/29.11lb	5 years	>54000hrs

## Ordering information:


For example: SPS100A02-HL10B-117DW

Company	LED type	Watt	LED code	Product	Finish color	LED QTY	CCT
SP	S S-SMD	100 100- 100W 150- 150W 200- 200W	A02 A02- Philips P02- Seoul	HL10	B B- Black	117 117- 100W 182- 150W 238- 200W	DW DW- 5000K NW- 4000K CW-5700K

## Structure:

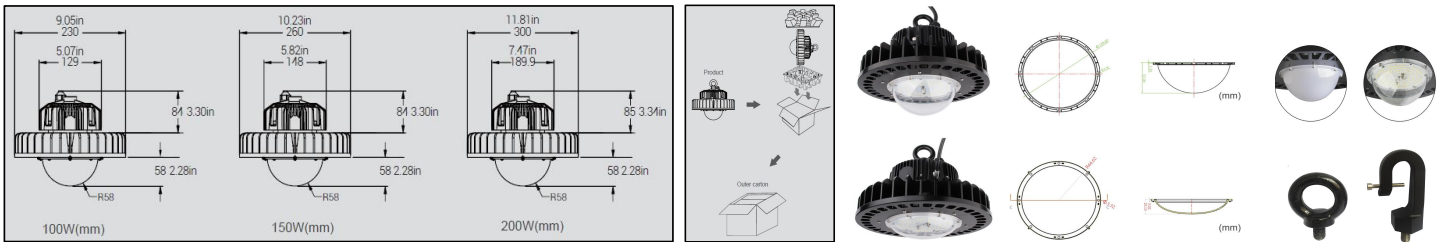

## Installation:

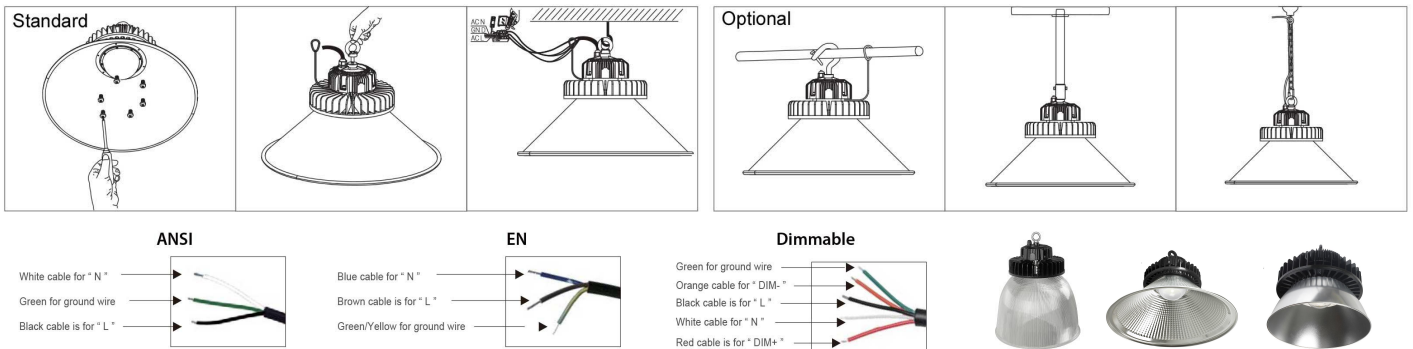

※ Note: If the lamp be used outside, please keep the connector water-proof.

### Remarks:

1. Lumen is based on the condition of Ta<25℃ with a tolerance of ±15 %.
2. To guarantee the long lifespan and safety of lamp fixture, please make sure fixture take regular cleaning and maintenance
3. Before installation,make sure power off
4. Installation of the fixture should be carried out by a qualified technician only.